


Timed Solenoid Drains

Specifications & operating information–

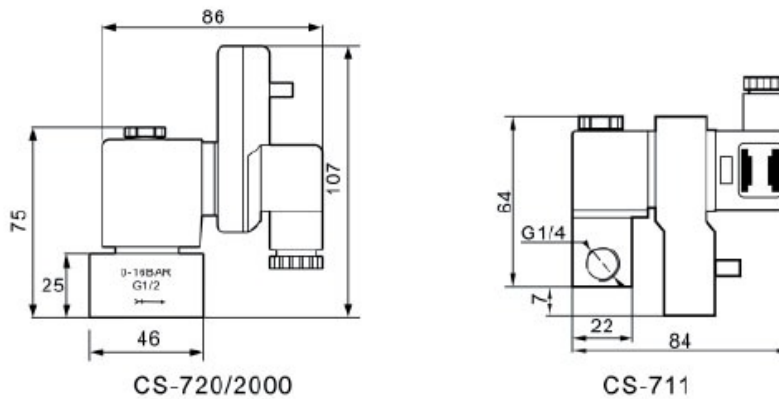

	CS-720	CS-2000	CS-711
Valve type	Two-position, two-way, direct acting solenoid valve		
Connection port	1/4", 3/8", 1/2" (Female)		1/8", 1/4"
Working Pressure	16bar, 80bar		16 bar
On time	0.5sec – 10sec	0.5sec – 99sec	2sec
Off time	0.5min – 45min	0.5min – 99min	0.5min – 120min
Ambient temp	-20C to +60C		
Valve body	Brass or Stainless steel (standard is brass)		
Orifice	1.9mm – 4.5mm		2mm
Insulation class	IP65 F Class, IP65 (with plug)		
Voltage	24vdc, 48vdc, 110v, 240v 50/60Hz		
Mounting	Multi-directional		

Installation: Install in any orientation, but with timer & coil above any possible joint leakage. We recommend installation of a strainer to protect the drain valve.

Setting: **CS 711** - Has a fixed 'open' time of 2 seconds. The interval is adjustable from approximately 1 minute to 120 minutes. Press 'Test' button to confirm correct operation

CS 720 - Has adjustable 'open' time approx 0.5 to 10 seconds. Interval is adjustable between 30 seconds to 45 minutes.